## **LUBRICATION MANAGEMENT CATALOG**





# Built to last Built to last Built to Pariorn

Modernize your Lubricant Storage and Handling Practices

Lubrication storage, handling, and dispensing is often overlooked, but it is critical to a successful maintenance program. Correct storage and handling can lead to real savings. The return on investment, often referred to as ROI, can be immediate with reduced equipment failures leading to increased production up-time. In fact, a few quick changes in your lube program can lead to improved work areas, safer conditions, cleaner lubricants, lower equipment maintenance cost, improved production, and more.

This brochure is designed to give you direction to get on the road to a world class lube room. Whether you have 3 lubricants or 30 - these tools will help guide you on your way. Does this guide contain everything you need to know, of course not, but it can definitely put you on the path to success.








### Fix Old Habits and Move to a World Class Lube Room

The above pictures show some of the 'old ways' of storing lubricants. Often times lubrication took a back seat but not anymore. Companies are realizing the massive savings in both time and money to proper lubricant storage. In addition, an unmanaged and messy lube room can lead to insurance issues and dangerous conditions. The bulk systems offered can lead to a world class lube room and a better workplace.



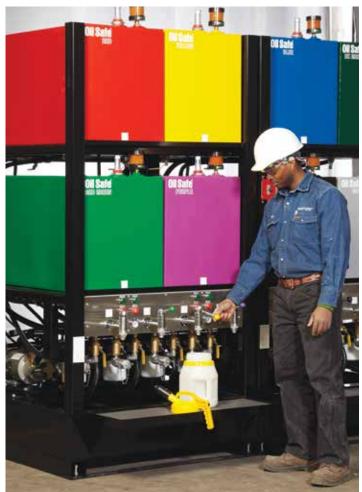





### **MODERNIZE LUBRICANT STORAGE AND HANDLING PRACTICES**

Oil Safe Bulk Systems are the most feature rich and highest quality lubricant storage and dispensing systems available. Perfect for any workplace looking to instantly establish best practice by quickly ridding itself of old bulk oil storage equipment and processes. An Oil Safe bulk storage system will enable you to take immediate control over your lubrication workflow process and get your lubricant storage areas and practices clean, efficient, and compliant.

The two main systems; Advanced and Lubrication Work Center become the main focus of any updated world class lube room. Each can be configured to meet your specific workplace requirements. Additional secondary systems are available to supplement lube management either in the field or in other areas of the workplace. Whether you need lube management help in the field with a Quad Con System or a remote part of the warehouse with a Drum Work Station - world class lube management is within reach.

1-630-852-1734

### ESTABLISH BEST PRACTICE

- Lubrication Reliability (5R's)
- LEAN Manufacturing
- Workplace Organization (5S)
- Environmental Compliance (SPCC)
- Safety Compliance (OSHA Right to Know)
- Tanks Mix and match different tanks and colors to meet your needs Custom Labeling - Add the optional labeling feature to receive fully integrated customized identification labeling for additional compliance Fluid Cleanliness - Minimize lubricant contamination Compliance - Features available to meet facility compliance Spill Control - Multi-Tier spill control Modular Heavy Duty Construction - With a fully welded and powder coated steel frame it is durable and also ships in pre-assembled modules Features - Rich in features and options to maximize budget and functionality



### SYSTEM FEATURES

- Color Coded Choice of 10 different colors for identification
- Tank Sizes Choose from 30, 65, 120, 240 gallon tanks
- Fire Safety Systems come with MSHA CFR30 rated hosing and have the option to include auto-shut off tank isolation valves
- OSHA Right to know with color coded and labeled tanks and taps to ensure accurate fluid identification and handling
- EPA SPCC Systems come standard with integrated spill containment
- Ships Assembled Save time with preassembled modules that are virtually ready to use within minutes
- Clean, Safe, and Professional Restores pride and in the work place and helps with facility inspections
- Lube Storage Accommodates lubricants up to ISO 680
- Various Configuration Scale the system to accommodate the number and volume of storage and dispensing

### FLUID CLEANLINESS

- In-Line Filtration
- Desiccant Breather Dedicated breather for each tank to remove airborne contaminants and moisture
- Dispense High quality auto-shut off taps
- Filling Dedicated suction hoses on the Advance and Work Center Systems
- Cleaner Fluid Dedicated pump and filter on each tank on the Advance and Work Center Systems
- Filtration With the Advance and Work Center it filters when you fill, dispense and you can also recirculate it (kidney loop)

### **GENERAL FEATURES**

- Integrated Pallets Integrated lift points built into the systems for easy forklift and hand truck transportation
- Gauges Top mounted gauges for easy and safe viewing of tank fill level
- Grounding Retractable cable reel grounding kit and system earth lugs to mitigate static electricity build up
- Lubricant Flexibility Suitable for storing machinery lubricating oils and glycol based lubricants
- Drip Trays Removable stainless steel drip trays collect spills that may occur when filling dispensing containers
- Power All systems come standard with 110v single phase TEFC motors; air pneumatic option available



## Lubrication Work Center System

The ultimate in lubrication management



The Oil Safe Work Center Bulk Storage System is like an instant lube room. The color coded central dispensing station makes filling with the right lubricant a snap. There is a storage cabinet below the dispensing station or if you upgrade to hose reels they are conveniently stored inside. Features color coding, pressurized dispensing taps, built in spill containment, and a separate pump/filter for each tank providing 3 way filtration (filters while filling, recirculate (kidney loop), and dispensing). Comes standard with a 25 micron Beta 2000 filter, other ratings available. Ships assembled and virtually ready to use.

- Dedicated Pump and Filter per tank This helps prevent cross contamination.
- Electrical Protection Circuit breakers, surge protectors, and motor overload protection.
- Spill Containment built in spill containment for work place safety and SPCC compliance.
- Three way filtration.


- Ergonomic Dispensing Station Dedicated dispensing station with work surfaces and storage.
- Heavy Duty Tanks Tanks available in 10 colors and 4 sizes; 30, 65, 120, and 240 gallon.
- Pre-Assembled Get up and running quickly without spending a couple of days chasing down tools and parts building a system.
- Compact Footprint Each pod is 46" wide x 46" deep x 88" tall.

Lubricat	Lubrication Work Center Specifications								
Pre-assembled	SPCC Spill Compliance	Taps	Pumps/Filter Sets	Filtration	Electrical Protection	Dispensing	High Viscosity Pumps	Fire Safety Upgrade	Hose Reels
Yes	Yes Depending on configuration	Pressurized	1 per tank	3-Way Fill, Dispense, Recirculate	Yes	Station	Yes	Optional	Optional


1-630-852-1734




info@ForFluids.com




Configuration: 4 x 65 Gallon Part Number : FF30400




Configuration: 4 x 30 & 2 x 65 Gallon Part Number : FF34200



Configuration: 4 x 120 Gallon Part Number : FF30040



Configuration: 6 x 65 Gallon Part Number : FF30600




Configuration: 4 x 65 & 2 x 120 Gallon Part Number : FF30420

Configuration: 6 x 120 Gallon Part Number : FF30060




Configuration: 8 x 65 Gallon Part Number : FF30800

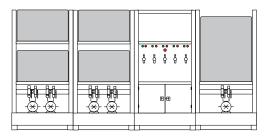

Configuration: 4 x 120 & 1 x 240 Gallon Part Number : FF30041

### Or Mix and Match - Build Your Own System

Mix and match different size tanks and create a system that matches your application. Choose from 30 gal, 65 gal, 120 gal, or 240 gallon tanks, Just tell us the number of tanks and sizes and we will create it just for you.

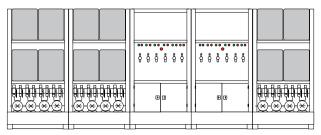


Configuration: 12 x 65 Gallon Part Number : FF30C00



## dvanced System

The most popular lubrication management system

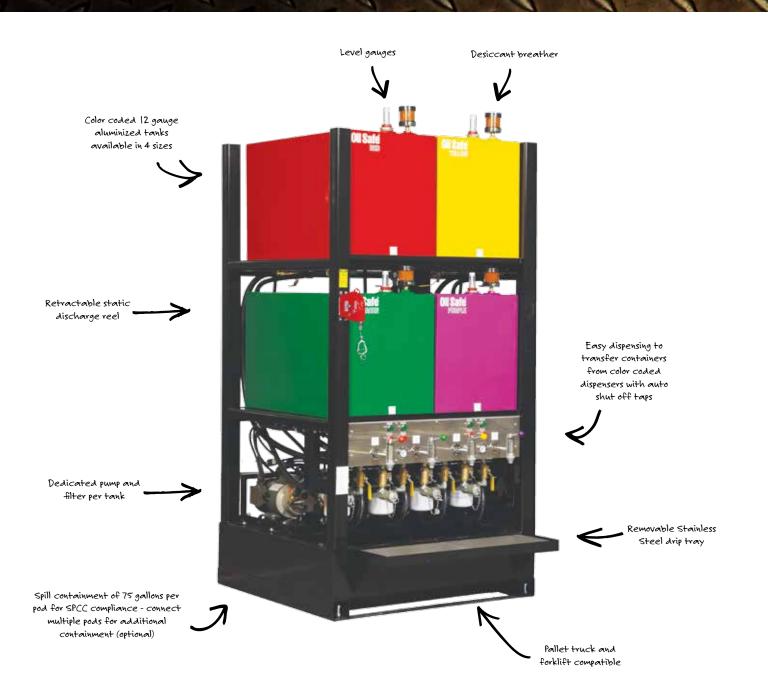

The Oil Safe Advanced Bulk Storage System can easily get you up to speed with best practices. This space efficient design features color coding, pressurized dispensing taps, built in spill containment, and a separate pump/filter for each tank providing 3 way filtration (filters while filling, recirculate (kidney loop), and dispensing). Comes standard with a 25 micron Beta 2000 filter, other ratings available. Ships assembled and virtually ready to use - just screw on the taps and the drip tray, plug it in and you have a best practice storage system.

- Dedicated Pump and Filter per tank This helps prevent cross contamination.
- Spill Containment built in spill containment for work place safety and SPCC compliance.
- Heavy Duty Tanks Aluminized steel tanks available in 10 colors and 4 sizes; 30, 65, 120, and 240 gallon.
- Pre-Assembled Get up and running quickly without spending a couple of days chasing down tools and parts building a system.

Three way filtration.


Compact Footprint - Each pod is 46'' wide x 61'' deep x 88'' tall.

Advance	Advanced Bulk System Specifications								
Pre-assembled	SPCC Spill Compliance	Taps	Pumps/Filter Sets	Filtration	Electrical Protection	Dispensing	High Viscosity Pumps	Fire Safety Upgrade	Hose Reels
Yes	Yes Depending on configuration	Pressurized	1 per tank	3-Way Fill, Dispense, Recirculate	Yes	Console	Yes	Optional	No


1-630-852-1734




info@ForFluids.com




Configuration: 4 x 30 Gallon Part Number : FF24000




Configuration: 4 x 65 Gallon Part Number : FF20400




Configuration: 2 x 65 & 1 x 120 Gallon Part Number : FF20210




Configuration: 8 x 65 Gallon Part Number : FF20800




Configuration: 12 x 65 Gallon Part Number : FF20C00




Configuration: 4 x 120 Gallon Part Number : FF20040



Configuration: 6 x 120 Gallon Part Number : FF20060



Configuration: 4 x 65 & 2 x 120 Gallon Part Number : FF20420

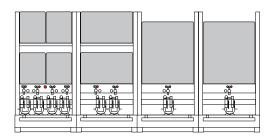

 $\begin{array}{c} \mbox{Configuration: 4 x 65 \& 2 x 120 \&} \\ 2 x 240 \mbox{ Gallon} \\ \mbox{Part Number : FF20422} \end{array}$ 

### Or Mix and Match - Build Your Own System


Mix and match different size tanks and create a system that matches your application. Choose from 30 gal, 65 gal, 120 gal, or 240 gallon tanks, Just tell us the number of tanks and sizes and we will create it just for you.





## Quad Con System

Instant lubrication management on the base, in the field, or on location.

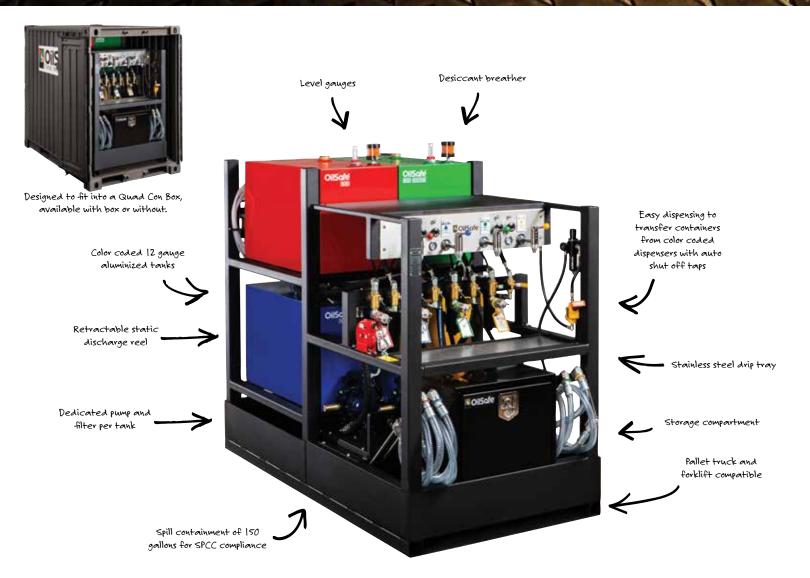

The Oil Safe Quad Con Advanced Bulk Storage System offers an instant best practice lubrication management on the base, in the field, or on location. This space efficient Quad Con design features color coding, pressurized and gravity dispensing taps, built in spill containment, and a separate pump/filter for each tank providing 3 way filtration (filters while filling, recirculate (kidney loop), and dispensing). Comes standard with a 25 micron Beta 2000 filter, other ratings available. Available in electric or pneumatic versions with or without the Quad Con container. Ships assembled and virtually ready to use.

• Dedicated Pump and Filter per tank - This helps prevent cross contamination.

1-630-852-1734

- Spill Containment built in spill containment for work place safety and SPCC compliance.
- Heavy Duty Tanks 12 gauge steel tanks available in 10 colors and 3 sizes; 30, 65, and 120 gallon.
- Pre-Assembled Get up and running quickly without spending a couple of days chasing down tools and parts building a system.
- Compact Design Each pod is 45" wide x 87" deep x 69.5" tall.

info@ForFluids.com

• Three way filtration.

Part #	Description	1							
FFM0400AQ	Pneumatic O	il Safe POL B	ulk System w	vith Quad Con	1				
FFM0400A	Pneumatic O	il Safe POL B	ulk System						
FFM0400EQ	Electric Oil S	lectric Oil Safe POL Bulk System with Quad Con							
FFM0400E	Electric Oil S	afe POL Bulk	System						
Quad Co	on Bulk System S	pecificati	ons						
Pre-assembled	SPCC Spill Compliance	Taps	Pumps/Filter Sets	Filtration	Electrical Protection	Dispensing	High Viscosity Pumps	Fire Safety Upgrade	Hose Reels
Yes	Yes	Pressurized and Gravity	1 per tank	3-Way Fill, Dispense,	Yes	Console	Yes	Optional	No

## **55 Gallon Drum Work Station**

**Remote best practice contamination control** 



Oil Drum and Oil Safe Container not included

The Oil Safe 55 Gallon Drum Work Station delivers best practice contamination control for 55 gallon drums in a space efficient form. This space efficient design features a stainless steel dispensing console and drop pan, pressurized dispensing tap, dedicated suction hose, and a pump/ filter providing 2 way filtration (filters while dispensing and recirculate (kidney loop). Comes standard with a 25 micron Beta 2000 filter, other ratings available. Ships assembled and ready to use.

- Dedicated stainless/PVC suction spear/hose for drum with cam coupler.
- Positive displacement gear pump with internal bypass.
- Two way filtration.
- Delivered pre-assembled and ready to use.

- Electronic stop/start buttons.
- Compact Footprint 14" wide x 24" deep x 65" tall.
- Drum can be placed on a drum deck or spill pallet for SPCC spill compliance if required.
- Available as electric or pneumatic.

Part #	Description
FF94500	55 Gallon Drum Work Station, TEFC 110v/14a
FF94520	55 Gallon Drum Work Station, TEFC 240v/10a
	Optional: available in pneumatic version


						F			
55 Gallo	n Drum Work Sta	tion Syst	tem Spec	cifications	5				
Pre-assembled	SPCC Spill Compliance	Taps	Pumps/Filter Sets	Filtration	Electrical Protection	Dispensing	High Viscosity Pumps	Fire Safety Upgrade	Hose Reels
Yes	No	Pressurized	1 per system	2-Way Dispense, Recirculate	Yes	Console	Yes	No	No

orFluids



## **Tote Dispensing Rack**

Filter incoming tote lubricants for contamination control

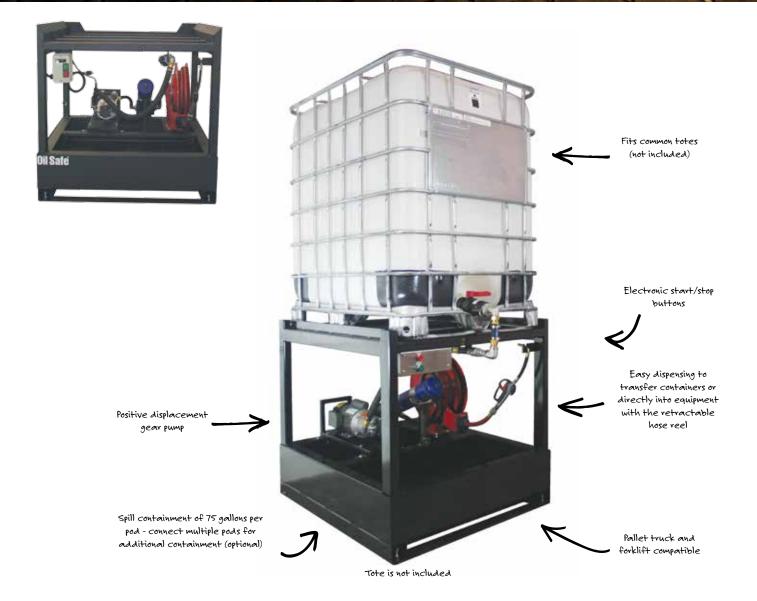

The Oil Safe Tote Dispensing Rack delivers best practice contamination control for common 300 gallon totes. This space efficient design lifts the tote off the ground for easy dispensing. Features retractable hose dispensing reel (25 feet) with trigger dispenser. Comes standard with a 25 micron Beta 2000 filter, other ratings available. Ships assembled and virtually ready to use - just attach the tote and connect hose (hose adapter may be necessary, available from the tote supplier), plug it in and you have a best practice dispensing rack.

• Positive displacement gear pump with internal bypass.

No

• Spill Containment - built in 75 gallon spill containment, additional spill pans available to expand spill capacity for SPCC compliance.

Pressurized

Hose Reel

 Heavy duty rack designed to accommodate totes with base dimensions less than 41"w x 46"d.

Reel

Yes

upgrade

No

• Pre-Assembled.

Yes

- Available in electric and pneumatic.
- Compact Footprint Each pod is 46" wide x 46"deep.

• Fits common totes.

Part #	Description								
FF94600	Tote Dispens	ing Rack, TE	FC 110v/14a						
FF94620	Tote Dispens	ing Rack, TE	FC 240v/10a						
	Optional: ava	ailable in pne	umatic versio	n					
Tote Disp	ensing Rack Spe	ecificatio	ns						
Pre-assembled	SPCC Spill Compliance	Taps	Pumps/Filter	Filtration	Electrical	Dispensing	High Viscosity	Fire Safety	Hos

Yes



1 per tank

1-Wav

Dispensing


info@ForFluids.com

Hose Reel

Yes

## **Bulk Fluid Transfer Skid**

Large volume lubricant management

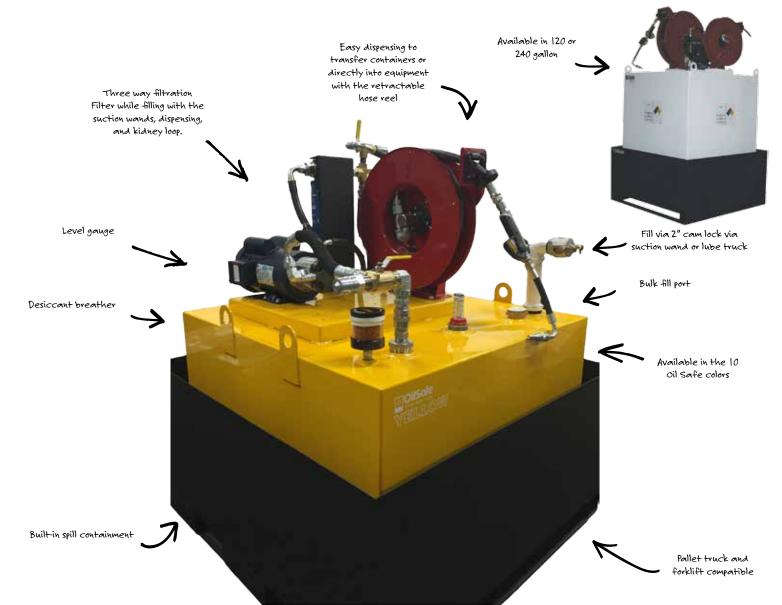


The Oil Safe Bulk Transfer Skid give operations bulk fluid mobility in a safe and rugged form. Available in two tanks sizes of 120 and 240 gallons, it offers facilities a way to manage larger amounts of fluid with integrated fork lift pockets. Dispense with the hose reel to transfer containers, fluid carts, or directly into nearby equipment. Comes standard with a 25 micron Beta 2000 filter, other ratings available. Ships assembled.

- 25ft Hose Dispensing Reel with high flow dispensing gun; Metering gun upgrade available.
- Spill Containment built in spill containment for work place safety.
- Three way filtration. Filters while filling (if not using bulk fill port), recirculate, and dispensing.
- Heavy Duty Tanks Aluminized tank available in 10 colors and 2 sizes; 120 and 240 gallons.
- Pre-Assembled Get up and running quickly without spending a couple of days chasing down tools and parts building a system.
- Compact Footprint Each pod is 46" wide x 46"deep.

Part #	Description
FF94700	120 Gallon Bulk Fluid Transfer Skid
FF94701	240 Gallon Bulk Fluid Transfer Skid
	Optional: available in pneumatic version

Bulk Flu	Bulk Fluid Transfer Skid Specifications								
Pre-assembled	SPCC Spill Compliance	Taps	Pumps/Filter Sets	Filtration	Electrical Protection	Dispensing	High Viscosity Pumps	Fire Safety Upgrade	Hose Reel
Yes	No	Pressurized Hose Reel	1 per tank	3-Way Dispensing	Yes	Hose Reel	Yes	No	Yes



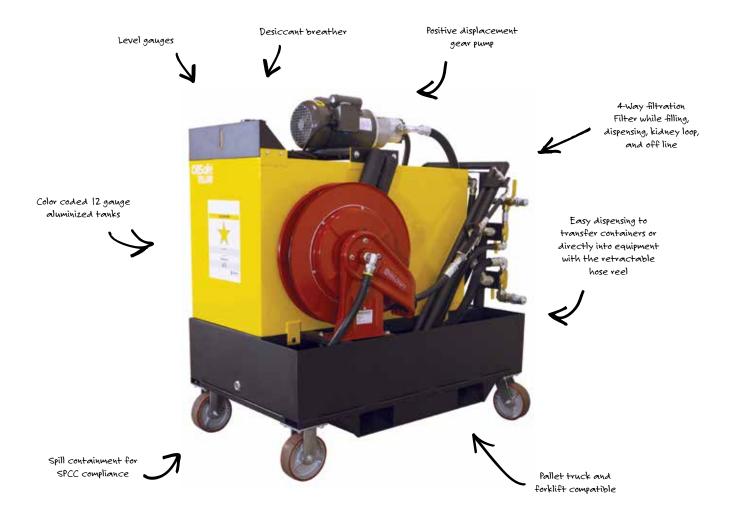

The Oil Safe Advance Fluid Handling Cart offers mobile best practices. This cart offers mobile storage of fluids in addition to fluid transfer and off-line filtration. Features color coding, 25ft dispensing hose reel, built in spill containment, and a pump/filter providing 4 way filtration (filters while filling, recirculate (kidney loop), dispensing, and off-line). Comes standard with a 25 micron Beta 2000 filter, other ratings available. Integrated forklift pockets and available with air or electric pumps. Ships assembled.

- 25ft Hose Dispensing Reel with high flow dispensing gun; Metering gun upgrade available.
- Spill Containment built in spill containment for work place safety and SPCC compliance.

Description

- Heavy Duty Tank 65 Gallon aluminized steel tank available in 10 colors.
- Pre-Assembled Get up and running quickly without spending a couple of days chasing down tools and parts building a system.
- Compact Footprint.

Advance	Advanced Fluid Cart Specifications								
Pre-assembled	SPCC Spill Containment	Taps	Pumps/Filter Sets	Filtration	Electrical Protection	Dispensing	High Viscosity Pumps	Fire Safety	Hose Reel
Yes	Yes	Pressurized Hose Reel	1 per tank	4-Way Fill, Dispense, Recirculate, Off Line	Yes	Hose Reel	Yes	Optional	Yes
				T 1 • 1					

Four way filtration.

14

1-630-852-1734

65 Gallon Advanced Fluid Handling Cart Optional: available in pneumatic version



info@ForFluids.com

## **Bulk System Features**

	Taka	Dulla			Qued	Advanced	Lubrication
FEATURES	Tote Dispensing	Bulk Transfer	55 Gallon Drum Work	Advanced Cart	Quad Con Bulk	Advanced Bulk	Work Center Bulk
	Rack	Skid	Station		System	System	System
CONSTRUCTION							
Color coded tank(s)	-	S	_	S	S	S	S
Forklift/Pallet truck transport	S	S	-	S	S	S	S
30 Gallon tank	-	-	-	0	0	0	0
65 Gallon tank	_	-	-	S	0	0	0
120 Gallon tank	-	0	-	-	0	0	0
240 Gallon tank	-	0	-	-	-	0	0
Aluminized steel tanks	-	S	-	S	S	S	S
12 Gauge aluminized steel frame	S	S	S	S	S	S	S
TGIC polyester powder coated	S	S	S	S	S	S	S
Pre-assembled	S	S	S	S	S	S	S
TEFC Motor pump system	S	S	S	S	S	S	S
Electrical protection; circuit, surge, and motor overload	S	S	S	S	S	S	S
Fire safety MSHA-CFR30 rated hosing	S	S	S	S	S	S	S
Fusible link auto-shut off isolation valve	-	-	-	-	0	0	0
Integrated spill containment	S	S	-	S	S	S	S
DISPENSING							
Auto shut off taps	-	-	S	S	S	S	S
Gravity dispensing	-	-	-	-	S	-	-
Pressurized dispensing	S	S	S	S	S	S	S
Electric pump operation	S	S	S	S	S	S	S
Pneumatic pump operation	0	0	-	0	0	0	0
Push button emergency system stop	-	-	-	-	S	-	S
Hose reel, 25ft	S	S	-	S	-	-	0
Digital metering gun for hose reel	0	0	-	0	_	_	0
Dispensing console	-	-	S	-	S	S	-
Dispensing station	-	-	-	-	-	-	S
FILTRATION							
Dedicated desiccant filter per tank	-	S	S	S	S	S	S
Dedicated pump per tank	S	S	S	S	S	S	S
Dedicated Filter per tank	S	S	S	S	S	S	S
Dedicated suction tube per tank	-	S	S	S	S	S	S
Filter during tank fill	-	S	-	S	S	S	S
Filter during dispensing	S	S	S	S	S	S	S
Filter recirculate (kidney loop)	-	S	S	S	S	S	S
Filter off-line	-	-	-	S	-	-	-
Beta 2000 spin-on filter	S	S	S	S	S	S	S
OPERATION							
Labeled tanks	-	S	-	S	S	S	S
Custom detailed labeling	-	0	-	0	0	0	0
Suction tubes with secure cam lock / ISO-B connectors	-	-	S	S	S	S	S
Drip tray, stainless steel	-	-	S	-	S	S	S
LED light	-	-	-	-	-	-	S
Level gauge	-	S	-	S	S	S	S
Remote digital LED level gauge	-	0	-	0	0	0	0
Retractable cable grounding kit	-	-	-	-	S	S	S
Pressure gauge	-	S	S	S	S	S	S
Wall mounted suction tube rack	-	-	-	-	-	0	0
Mobile suction tube cart	-	-	-	-	-	0	0
Tank overfill alarm	—	0	—	0	0	0	0
Lubricants up to ISO 680	S	S	S	S	S	S	S
Sampling Port	—	-	-	S	S	S	S




## Bulk System Upgrades / Accessories



### Storage Cabinet

This large cabinet has the same dimensions as the bulk systems and offers tons of room for storing all types of grease and lube related items. Features four deep shelves, six smooth glide drawers, plastic bins, and rugged construction. Ships fully assembled. Dimensions: 88"h x 46"w x 46"d. 890150 Storage Cabinet

890151 Storage Cabinet with Integrated Spill Containment











### **Hose Rack**

After emptying drums, totes, or pails, the suction hoses for the Advance and Work Centers can be stored in the Mobile Hose Cart, on Wall Mounted Rack, or if space permits on the side of your system with a Frame Mount Rack. 895004 Mobile Suction Hose Cart, 4 Hose 895006 Mobile Suction Hose Cart, 6 Hose 895008 Mobile Suction Hose Cart, 8 Hose 895010 Mobile Suction Hose Cart, 10 Hose 895012 Mobile Suction Hose Cart, 12 Hose 895104 Wall Mount Suction Hose Rack, 4 Hose 895106 Wall Mount Suction Hose Rack, 6 Hose 895108 Wall Mount Suction Hose Rack, 8 Hose 895204 Frame Mount Suction Hose Rack, 4 Hose 895206 Frame Mount Suction Hose Rack, 6 Hose 895208 Frame Mount Suction Hose Rack, 8 Hose



### Remote LED Display

Remote LED level display that accurately and reliably measures the level in your tank. It will transmit and display the level information to the wired LED display that you can put virtually anywhere. Features colored LEDs, 25ft cord, hi/lo level alarms. Powered by 9v battery (not included). Part Number : FFRLD01



### **Tank Overfill Alarm**

Direct mount tank overfill alarm fits easily to tank level gauges and can be supplied with your system or retrofitted to an existing system. Features audible alarm, flashing light, reset, powered by 9 volt lithium battery (supplied), and test switch. Part Number : 897102



### **Spill Containment Kit**

Increase system spill containment for additional protection of SPCC compliance. 821352 Connector Kit, 2 Frame

821352 Connector Kit, 2 Frame 821353 Connector Kit, 3 Frame 821354 Connector Kit, 4 Frame 821355 Connector Kit, 5 Frame 821356 Connector Kit, 6 Frame



### Filter

Premium high quality Beta 2000 micro glass replacement bulk system filters provide maximum particle holding capacity and efficient operation. 469962 Filter Element OSF4 B2000 - 4um 469966 Filter Element OSF7 B2000 - 7um 469966 Filter Element OSF25 B2000 - 25um



### **Breather** Replacement desiccant breather to help prevent moisture and airborne contaminants

from entering tank. Part Number : Z134



### **Hose Reel**

Retractable hose reels with trigger operated dispensing nozzles. A 3/4'' diameter hose is available in 25 ft length allowing dispensing to lubricant carts, containers, or equipment.

Part Number : 8Z0225 Hose Reel, 25 ft

Upgrade available only with Lubrication Work Center. 25ft Hose Reel standard on Tote Dispensing Rack, Bulk Transfer Skid, and Advanced Fluid Cart.



### **Digital Metering Gun**

Digital metering gun with nozzle and rigid spout provide instant and accurate measurement of dispensing volume. Part Number : 821251

Available for the Lubrication Work Center, Tote Dispensing Rack, Bulk Fluid Skid, and Advanced Fluid Handling Cart.



### Fire Safety Upgrade

The Fire Safety Upgrade helps to protect the facility in the event of a fire by preventing the tank from draining with a fusible link.

8Z0101 Advanced & Work Center Protection Includes fusible link (165°F) auto-shut off tank isolation valves. Order (1) upgrade for each tank on your system.



### **Custom ID Labeling**

Customized identification labeling upgrades are available for the bulk systems to assist with no mistake application for OSHA Right to Know compliance and NFPA. Part Number : 8Z0300





15

0r



# **Oil Safe**

For nearly two decades, the Oil Safe System has been the oil transfer management system preferred by leading companies around the world.

People often go to great lengths to preserve the quality of their oil only to contaminate it by using filthy containers, pouring it through a dirty funnel, or inadvertently mixing it with different oil.

The Oil Safe system is a fully sealing unit that prevents contaminants from getting into the oil. The pour spouts available make dispensing quick and easy and with 10 different colors help prevent cross contamination.

### Available in 10 Colors



ForF





## **Lube Containers**

### WARNING: Not suitable for fuels or solvents.



### Mini Spout Lid

With an outlet diameter of approximately .25" (7mm), this spout is ideal for lubrication jobs where equipment filler holes are small. The narrow spout is perfect for precise filling.

100400	Mid Green	100405
100401	Orange	100406
100402	Purple	100407
100403	Red	100408
100404	Yellow	100409
	100401 100402 100403	100400         Mid Green           100401         Orange           100402         Purple           100403         Red           100404         Yellow



### Stretch Spout Lid

Designed for use where precision pouring of lubricants is required including hard to reach areas. With a .5" spout opening and longer spout, this lid is ideal for lower viscosity oils (<ISO 220).

Beige		Mid Green	100305
Black	100301		100306
Blue	100302	Purple	100307
Dark Green	100303	Red	100308
Gray	100304	Yellow	100309



# Stumpy Spout Lid This wide spout model with a 1" opening is designed for applications where a higher lubricant flow is required. Match with a Stumpy Extension Hose to help with hard to reach fill points.

	······································		pontoi
Beige	100500	Mid Green	100505
Black	100501	Orange	100506
Blue	100502	Purple	100507
Dark Green	100503	Red	100508
Gray	100504	Yellow	100509
	and the second se		



Stretch Spout Extension Hose 12"



**Utility Lid** This multi purpose lid with a large 2" outlet hole ensures controlled fast pouring of lubricants. Match this lid to a 3, 5, or 10 liter/quart drum for use with Oil Safe pump.

·····, deare er er er er er er er e per pr							
Beige	100200	Mid Green	100205				
Black	100201		100206				
Blue	100202	Purple	100207				
Dark Green	100203	Red	100208				
Gray	100204	Yellow	100209				

## Tip: Any Oil Safe lid fits my Oil Safe

### Drum

Every Oil Safe lid fits any Oil Safe drum. Fully interchangeable with lids and have an extra wide neck opening for rapid pouring and easy cleaning. Has Metric/Quart marks.

1.5 Liter/US Quart	101001
2 Liter/US Quart	101002
3 Liter/US Quart	101003
5 Liter/US Quart	101005
10 Liter/US Quart	101010



Excellent for lubricating hard to reach fill points. This down stroke discharge pump delivers 1 liter for approximately 12 strokes. Match with the Utility Lid and 3, 5, or 10 liter/quart Oil Safe drum.

Standard Pump	102000						
Pump Accessories (Standard & Premium)							
5' Replacement Pump Hose	920206						
10' Replacement Pump Hose	920207						
5' Replacement Hose w/ ¼" NPT	920208						
10' Replacement Hose w/ 1/4" NPT	920209						
Pump Reducer Nozzle	102030						



Storage Lid With this lid, Oil Safe drums can be pre filled for storage or easier transportation. This is a convenient alternative to handling those bulky 5 gallon pails.

Beige	100100	Mid Green	100105
Black	100101	Orange	100106
Blue	100102	Purple	100107
Dark Green	100103	Red	100108
Gray	100104	Yellow	100109

orFluids

Tip: Pump ot be use with a 1.5 or 2 quart drum

102020



accessory port. (not included)

920250

102021

10 micron Trap Breathe

Stumpy Spout Extension Hose 10"

**Premium Pump** This heavy duty discharge pump is fully serviceable, color coded, accessory port, and has an ultra comfortable D handle grip design. Match with the Utility Lid and 3, 5, or 10 liter/quart Oil Safe drum.

Beige	102300	Mid Green	102305
Black	102301	Orange	102306
Blue	102302	Purple	102307
Dark Green	102303	Red	102308
Gray	102304	Yellow	102309
Premium Pur	np Acce	ssories	
5' Hose 1/4" NPT	Kit w/bre	ather	920220
10' Hose ¼" NF	920225		
3 micron Baffle		920255	



Improve your lubrication instantly and get up and running with 5 different drums and lids including a standard pump and spout extensions. Starter Kit

FI	-0010
----	-------



## **Fix Old Habits**



Don't use old containers to transport fluid to any equipment. It quickly introduces contamination



Funnels are susceptible to dirt and dust in addition to cross contamination. Use the ForFluids Oil Safe containers and if you have to use a funnel, use a disposable paper funnel



Don't store drums where dust and dirt can collect on top or in locations where they can collect rain water







Double violation Just don't do this

Open air transfer containers introduce moisture, dust, and dirt to your fluids. Use a closed transfer container assigned only to one fluid



## **Grease Equipment**



All style grease guns include both steel extension and flexible extension.

### Pistol Grip Grease Gun

This heavy duty grease gun is ideal for one handed operation and designed for use in confined spaces.

- 3-way packable (suction, cartridge, filler pump) Super strong pistol grip handle with rubber tip Design prevents fingers from pinching Includes both 4" steel and 12" flexible extensions
- •

Clear grease guns are made of impact resistant polycarbonate and are designed for industrial environments.


### Lever Grease Gun

Variable stroke lever action for greater control of delivery. Designed for industrial day to day applications.

- 3-way packable (suction, cartridge, filler pump)
- •
- Rubber grip for non-slip operation Includes both 6" steel and 12" flexible extensions •

Clear grease guns are made of impact resistant polycarbonate and are designed for industrial environments.

Туре	Beige	Black	Blue	Dark Green	Gray	Mid Green	Orange	Purple	Red	Yellow
COLOR-CODED STEEL TUBE GREASE GUNS										
Pistol Grip	330700	330701	330702	330703	330704	330705	330706	330707	330708	330709
Lever	330300	330301	330302	330303	330304	330305	330306	330307	330308	330309
Replacement Steel Tube	332300	332301	332302	332303	332304	332305	332306	332307	332308	332309
COLOR-CODED CLEAR TUBE GREAS	E GUNS									
Pistol Grip	330800	330801	330802	330803	330804	330805	330806	330807	330808	330809
Lever	330500	330501	330502	330503	330504	330505	330506	330507	330508	330509
Replacement Clear Tube	332200	332201	332202	332203	332204	332205	332206	332207	332208	332209

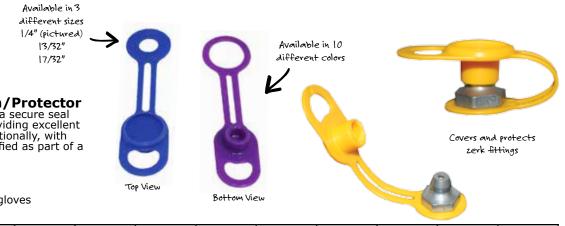

**Grease Fitting Identification/Protector** These grease fitting protectors deliver a secure seal over most common grease fittings providing excellent protection against contamination. Additionally, with 10 colors, fittings can be quickly identified as part of a visual lubrication program. • Available in 10 colors • Durable industrial material • Makes grease fittings easy to find • Easy to use - even when wearing gloves • Supplied in bag of 100

Size	Beige	Black	Blue	Dark Green	Gray	Mid Green	Orange	Purple	Red	Yellow
1/4" (6.3mm) Bag of 100	291000	291001	291002	291003	291004	291005	291006	291007	291008	291009
13/32" (10.3mm) Bag of 100	291100	291101	291102	291103	291104	291105	291106	291107	291108	291109
17/32" (13.5mm) Bag of 100	291200	291201	291202	291203	291204	291205	291206	291207	291208	291209



**Content Labels** 

Available in 10 colors and a variety of sizes and materials, helps with lubrication management, reducing errors, and safety compliance.



Size	Labels/ Sheet	Beige	Black	Blue	Dark Green	Gray	Mid Green	Orange	Purple	Red	Yellow
POLYESTER ADHESIVE											
2″ x 3.5″	10	282100	282101	282102	282103	282104	282105	282106	282107	282108	282109
2" Circle	12	282200	282201	282202	282203	282204	282205	282206	282207	282208	282209
3.25" x 3.25"	6	282300	282301	282302	282303	282304	282305	282306	282307	282308	282309
.5" x 5.5" Drum Ring	20	282400	282401	282402	282403	282404	282405	282406	282407	282408	282409
WATER & TEAR RESIS	STANT PAPER										
2" x 3.5"	10	280000	280001	280002	280003	280004	280005	280006	280007	280008	280009
2" Circle	12	280500	280501	280502	280503	280504	280505	280506	280507	280508	280509
3.25" x 3.25"	6	280300	280301	280302	280303	280304	280305	280306	280307	280308	280309

### Labeling Accessories

Extend the identification of lubricants and equipment by utilizing these accessories.



### **Color Drum Ring**

This drum ring fits securely onto Oil Safe containers and provides an additional layer of color coding. A hook offers additional labeling options with leashes and pouches.

Beige	207000	Mid Green	207005
Black	207001	Orange	207006
Blue	207002	Purple	207007
Dark Green	207003	Red	207008
Gray	207004	Yellow	207009



Label Pocket Pockets available in 2 sizes and fits content labels, card stock, and more. The larger size offers space for additional information such as MSDS or other information. 2" x 3 5" 200101

2″ x 3.5″	200101
4" x 3.25"	200102



### Label Leash

Label Leash

Securely attach label pockets to containers, drum rings, machinery, piping, and more. Industrial grade and can be easily removed and reused.

	202001
--	--------



# **Custom Labeling**

### **Custom Labels**

Available in same 10 colors and a variety of sizes and materials, including 10 different shapes - but customized for your applications. We can print the following information or leave it blank for you to hand write:

- Color ٠
- Shape •
- Manufacturer •
- Product Name Viscosity
- Application

COLOR

TAN

BLACK

GREY


ORANG


YELLOW

Additional Information

Or we can create a custom label.

MID GREEN DIAMOND Schaeffer #315 Simplex Supreme Tractor Hydraulic Fluid







Size	Labels/Sheet	Polyester Adhesive	Water & Tear Resistant Paper	Plastic Card
2" x 3.5" Rectangle	10	PA22001	PW22001	-
2" Circle	12	PA22002	PW22002	-
3.25" x 3.25" Square	6	PA22003	PW22003	—
.5" x 5.5" Drum Ring	20	PA22005	—	-
2.2" x 3.4" Rectangle	1 (Single Side or Double Side)	-	_	ZP22006 (ID Single Side) ZP22106 (ID Double Side) ZP23206 (ID one side/NFPA other Side)
8.5″ x 11″	1	PA85011	—	-
8″ x 5″	1	PA22008	_	—





## Safety/Storage Cabinets



Safety Cabinets are ideal for fuels, solvents, and lubricant storage; a perfect compliment to your fluid management program. Available in various sizes with adjustable shelves gives you the versatility to store fluids to fit your requirements. Conforms to NFPA Fire Code No. 30 and OSHA standards.

- Constructed of 18-gauge steel.
- All welded, reinforced double wall construction with insulating air space to offer fire resistant protection.
- Leak proof 2" bottom pan prevents leakage from accidental spills.
- Adjustable galvanized steel shelves hold up to 350 lbs.
- Doors include 3-point latching device with key lock.
- Self closing door models feature a fusible link that melts when ambient temperature reaches 160°.
- Grounding wire connections standard to dissipate static electricity buildup.
- Screened flame arrester vents on both sides of cabinet with 2" threaded fittings for external exhaust and with fire baffle and cap.
- Leveling pads.
- · Ships assembled.

SAFETY CABINETS								
Part #	Door Type	# Shelves	Capacity	Width	Depth	Height	Weight	
930500	Manual	1	30 gallon	43″	18″	44″	231 lbs	
930510	Manual	2	45 gallon	43″	18″	65″	310 lbs	
930520	Manual	2	60 gallon	32″	32″	65″	387 lbs	
930700	Self Closing	1	30 gallon	43″	18″	46″	246 lbs	
930710	Self Closing	2	45 gallon	43″	18″	67″	330 lbs	
930720	Self Closing	2	60 gallon	34″	34″	67″	407 lbs	



Instantly organize your lubricant and equipment area with this high quality storage cabinet. Featuring bins and shelves for all of your lubrication and grease accessories.

- Tilt style bins inside cabinet doors swing forward to allow free access to contents, then tilt back for storage. Tilt bins supplied with removable dividers to provide maximum storage options.
- All welded, 14 gauge steel construction.
- Removable plastic parts bins easily clip on and off internal racks bins are also stackable when not attached to cabinet.
- Flush mounted stainless steel door latch with key.
- Door casters beneath swing out door to support heavy loads on the large model cabinet.
- Ships assembled.

### STORAGE CABINETS # Large # Small # Door Tilt Description Width Part # Plastic Depth Height Door Bins Bins Bins 930005 Medium 0 36" 24" 72" 50 14 Storage Cabinet 930010 51 12 12 36" 36" 78" Large Storage Cabinet



## **Spill Decks/Pallets**







There's no need to worry about incidental spills on your factory floor. These spill decks are easy to load with a low profile design and optional ramp. Each spill deck is designed for stand-alone use or can connect with other spill decks for using Link-Locks, for a customized work area.

- Tough, one piece polyethylene construction will not rust or corrode.
- Large sump capacity catches incidental spills.
- Removable heavy-duty structural form grates for easy cleaning.
- Rolled-edge design helps resist cracking and warpage.
- Doors include 3-point latching device with key lock.
- Ramp hooks onto spill deck for easy loading.
- Create a solid workspace using Link-Locks.

SPILL DEC	KS					
Part #	Description	Description Dimensions		Spill Capacity gal (L)	Weight lb (kg)	Regulations
450512	2 Drum Spill Deck	inch: 53 x 28.5 x 6 cm: 135 x 72 x 15	2400 (1089)	400 (1089) 22 (83.2) 39 (18)		EPA 40 CFR 264.175, SPCC, NPDES and UFC
450514	4 Drum Spill Deck inch: 53 x 53 x 6 6000 cm: 133 x 135 x 15		6000 (2722)	40 (151.4)	71 (32)	EPA 40 CFR 264.175, SPCC, NPDES and UFC
450516	6 Drum Spill Deck	inch: 77 x 53 x 6 cm: 196 x 135 x 15	7000 (3175)	61 (230.9)	102 (46)	EPA 40 CFR 264.175, SPCC, NPDES and UFC
450518	8 Drum Spill Deck	inch: 100 x 53.25 x 6 cm: 254 x 135 x 15	8000 (3629)	77 (291.4)	163 (74)	EPA 40 CFR 264.175, SPCC, NPDES and UFC
450520	Link Lock for Spill Decks, 1 pair	inch: 9.5 x 7 x 3.5 cm: 24 x 18 x 9	_	_	3 (1.3)	_
450555	6" Ramp	inch: 46 x 26 x 6 cm: 117 x 64 x 16	1000 (454)	_	30 (14)	_







Spill pallets offer greater secondary containment to meet regulatory requirements. Raised edges on back and sides helps orient barrels on the pallet. Pallets are forkliftable and have removable grates for easy cleaning. Includes drain and plug. The IBC Spill Pallet gives bulk container users more versatile spill containment. It fits more than 99% of all IBC dispensing units and features a large sump capacity of 385 gallons; more than exceeding EPA 40 CFR 264.175 regulations. The unit also comes with an integrated 5-gallon pail holder for quick and easy dispensing. A one-piece, light weight, 100% polyethylene IBC spill containment unit that is forkliftable and nestable for convenient shipment and storage and it reduces shipping costs. The polyethylene construction will not rust, corrode, or have

SPTLL PALLETS

adverse reactions with chemicals.

SPILL PALL						
Part #	Description	Dimensions	Load Capacity lb (kg)	Spill Capacity gal (L)	Weight lb (kg)	Regulations
450612	2 Drum Spill Pallet	inch: 54 x 29 x 17 cm: 136 x 74 x 43	2000 (907)	58 (219.5)	56 (25)	EPA 40 CFR 264.175, SPCC, NPDES
450614-IL	4 Drum - In Line Low Profile Spill Pallet	inch: 98 x 25 x 12 cm: 249 x 64 x 30	3000 (1361)	66 (250)	84 (38)	EPA 40 CFR 264.175, SPCC, NPDES and UFC
450614-LP	4 Drum - Square Low Profile Spill Pallet	inch: 54 x 54 x 12 cm: 137 x 137 x 30	6000 (2721)	66 (250)	91 (42)	EPA 40 CFR 264.175, SPCC, NPDES and UFC
450503	IBC Spill Pallet	inch: 73 x 81 x 30 cm: 185 x 204 x 75	8000 (3629)	385 (1457)	291 (132)	EPA 40 CFR 264.175, SPCC, NPDES and UFC
450315	12" Ramp	inch: 68 x 31 x 12.5 cm: 172 x 78 x 32	1000 (454)	_	65 (30)	_
450316	Ramp Extender	inch: 29.5 x 8.5 x 5.5 cm: 75 x 22 x 14	1000 (454)	-	6 (2.7)	_





## **Filtration Solutions**

### **Customized Filtration Solutions for Many Applications**

These fully customizable filtration systems offer workplace solutions for a variety of applications. Whether it is for prefiltering new oil, transferring oil, topping off reservoirs, dispensing new oil, filtering contaminated systems, or more - there is a configuration for you. These quality systems can be customized with different pumps, filters, hoses, connections, and colors.





- Typical Applications:
- Filtering contaminated systems
- Flushing new or repaired systems
- Pre-filtering new oil
- Transferring oils
- Topping off reservoirs
- Collecting oil samples for analysis
- Dispensing new oil



**DRUM TOPPER** Frame Style: DT

- Typical Applications:
- Pre-filtering new oil
- Transferring oils
- Topping off reservoirs
- Dispensing new oil



### **FILTER PACK** Frame Style: FPA / UFPA

Typical Applications:

- Filtering contaminated systems
- Flushing new or repaired systems
- Pre-filtering new oil
- Transferring oils
- Topping off reservoirs
- Dispensing new oil



PANEL UNIT Frame Style: PU

- Typical Applications:
- Filtering contaminated systems
- Collecting oil samples for analysis • Dispensing new oil



- Typical Applications:
- Filtering contaminated systems
- Flushing new or repaired systems
- Pre-filtering new oil
- Transferring oils
- Topping off reservoirs
- Dispensing new oil



### **FILTER CART** Frame Style: HT

- Typical Applications:
- Filtering contaminated systems
- Flushing new or repaired systems
- Pre-filtering new oil
- Transferring oils
- Topping off reservoirs
- Collecting oil samples for analysis
- Dispensing new oil

1-630-852-1734



**TANDEM FILTER CART** Frame Style: TH

- Typical Applications:
- Filtering contaminated systems
- Flushing new or repaired systems
- Pre-filtering new oil
- Transferring oils
- Topping off reservoirs
- Collecting oil samples for analysis
- Dispensing new oil



### **PLATFORM CART** Frame Style: PT

Typical Applications:

- Pre-filtering new oil
- Transferring oils
- Topping off reservoirs
  - Dispensing new oil

orFluids.com

Fra	me Style	Filter Head	Primary Filter	Secondary Filter	Power Source/Pump	Hoses	Hose Connections		Frame Color		Additional Options	
FRAME STYLE	PT71     Platform Cart w/ 71 gal Poly Tank       PT15     Platform Cart w/ 115 gal Poly Tank       ZC     Special Filter Cart Construction					an Diamond Plated, FilterPak (Single D series head)       an Diamond Plated, FilterPak (Single D series head)       c       115v, 60Hz, 1/2 HP         t, Aluminum Framed FilterPak (Single M series head)       t       C       115v, 60Hz, 1/2 HP         t, Aluminum Framed FilterPak (Single M series head)       t       C       115v, 60Hz, 1/2 HP         t, Aluminum Framed FilterPak (Single M series head)       t       E       Explosion Proof (Available in 115v and 230v)         t       T       Three Phase, 230/460v       T         n, Steel Tote Cart       T       Three Phase, 230/460v         Cart w/ 32 gal Poly Tank       ZP       Special Power Source         Cart w/ 22 ea 32 gal Poly Tanks       T       1 GPM         Cart w/ 115 gal Poly Tank       C       2 GPM         Cart w/ 115 gal Poly Tank       F       C GPM						
FILTER HEAD	Y D5 M NF ZF	Medium Low Pre No Head		Aluminum Head		HOSES	ZX NH SH SH1		Dption Iose (3/4" Suct Iose (1' Suction			
ſ.	Y Series Filters (Only used with the Drum Topper)33"x 8", 3 Micron Filter Element, β3=100053"x 8", 5 Micron Filter Element, β7=1000					ЮН	WH WH1 ZH CQ	7ft Black Hydra	aulic Hose (1" S /pe and/or Leng	uction & 3	2 1/2" Discharge) /4" Discharge)	
PRIMARY FILTER ELEMENT (1ST STAGE)	7 $3"x 8"$ , 7 Micron Filter Element, $\beta 7=1000$ 12 $3"x 8"$ , 12 Micron Filter Element, $\beta 12=1000$ 22 $3"x 8"$ , 22 Micron Filter Element, $\beta 22=1000$ WR $3"x 8"$ , Water Removal Element         WR $3"x 5"$ , Water Removal Element         NE       No Element         M Series Filters (Only used with the M series Heads)         3 $5"x 10"$ , 3 Micron Filter Element, $\beta 3=1000$				HOSE END CONNECTIONS	TE SQ SQ1 AQ AQ1 FQ FQ1	Threaded Ends 3/4" & 1/2" ISO B Quick Disconnects w/ Steel Dust Plugs 1" & 3/4" ISO B Quick Disconnects w/ Steel Dust Plugs 3/4" & 1/2" ISO A Quick Disconnects w/ Steel Dust Plugs 1" & 3/4" ISO A Quick Disconnects w/ Steel Dust Plugs 3/4" & 1/2" Flush Face Quick Disconnects w/ Steel Dust Plugs 1" & 3/4" Flush Face Quick Disconnects w/ Steel Dust Plugs					
ILTER ELEN	3 6 10 25 WR	5"x 10", 5"x 10", 5"x 10",	6 Micron Filter E 10 Micron Filter 25 Micron Filter Water Removal	lement, β6=10 Element, β10= Element, β25=	00 1000	0	HW NQ ZQ NC	Hose Wands No Connections Special Connec No Cord				
PRIMARY FI	NE <b>D Se</b> 4 7 10 25	5"x 14", 5"x 14", 5"x 14",	nent My used with the 4 Micron Filter E 7 Micron Filter E 10 Micron Filter 25 Micron Filter	lement, β4=20 lement, β7=20 Element, β10=	00 00 1000	ELECTRIC CORD	4P 8P 40R 25C ZW	4ft Electric Con 8ft Electric Con 40ft Retractabl 25ft Electric Co Special Cord Ty	d le Cord Reel ord		Tip: Each system is cu built to your specificat It may take longer b you known	
	WR NE	5"x 14", No Elem	Water Removal	Element		FRAME COLOR OPTIONS	1 2 3	Blaze Orange Red Blue			something you need. Pl	
(AGE)	3 5 7 12	3"x 8", 3 3"x 8", 5 3"x 8", 7	3 Micron Filter Ele 5 Micron Filter Ele 7 Micron Filter Ele 12 Micron Filter E	ement, β3=100 ement, β7=100 ement, β7=100	0	FRA COL	4 5 6 7	Black Yellow Silver Special Color		G	there are many option and ways to configure ive us a call and we configure help guide you.	
ENT (2ND SI	22 WR WR NE	3"x 8", 2 3"x 8", V 3"x 5", V No Elem	22 Micron Filter E Water Removal El Water Removal El	lement, β22=1 ement ement	000		A B D E F	High Oil Tempe Manual Bypass Digital Flow Me Color Coded De Visual Flow Me	s Valve ter/Totalizer elta P Gauge			
SECONDARY FILTER ELEMENT (2ND STAGE)	3 6 10 25 WR NE	5"x 10", 5"x 10", 5"x 10", 5"x 10", 5"x 10", 5"x 10", No Elem Filters (O 5"x 14", 5"x 14",	3 Micron Filter E 6 Micron Filter E 10 Micron Filter 25 Micron Filter Water Removal	Ilement, $β3=10$ Ilement, $β6=10$ Element, $β10=$ Element, $β25=$ Element φ <i>D</i> series Head Ilement, $β4=20$ Ilement, $β7=20$	00 00 1000 1000 s) 00 00	OPTIONS	L MF HE N O P S T W Y SR	Heat Exchange Push Button Sa Standard Minin Inline Particle ( Y-Strainer (149 On/Off Timer C	ness Sample Po Counter mesh) ontrol Monitor <i>(For us</i> e er Indicator	er/Oil) orts	Particle Counter)	
S	25 WR NE	5"x 14",	25 Micron Filter Water Removal	Element, ß25=	2000		FF Z	No Flat, 13" Tir		Options no	ot listed	

1-630-852-1734

**ForFluids**.com

info@ForFluids.com

istom tions. ut iving lus,

## Miscellaneous





### **Rotary Barrel Pump**

This heavy duty rotary barrel pump has an aluminum die cast body and includes a 2" cast iron bung adaptor and die cast aluminum handle with security locking latch.

- Complete with a 3 pc threaded suction tube for use on 15 gallon (50 liter) 55 gallons (205 liter) barrels.
- Recommended for use with lubricating oils up to SAE 30, gasoline, diesel fuel, and kerosene.
- 1.8 m PVC nitrile delivery hose with metal nozzle, spring, and hose clamp.
- Delivers 1 liter for 12 strokes.
- Do not use with corrosive liquids, solvents, acids, alkalis, and similar liquids. Never operate the pump near fire or source of spark.

Part Number : 950020



### Lever Action Barrel Pump

Designed to fit containers ranging in size from 15 gallon (50 liter) through 55 gallon (205 liter), this popular lever action pump is engineering for industrial use.
A plated steel lever handle with rubber grip for convenience.
Built in 1.5" and 2" bung for use on drums with either opening.
Premium power coated steel pump body with ribber section aluminum die cast

- pump head for maximum strength.
- With a non return viton seal the pump can also be used with anti-freeze, solvents, thinners, automotive additives, industrial chemicals, and other non corrosive liquids. It is not suitable for water based fluids, gasoline, and corrosive fluids.

Part Number: 950000



### **Drum Opener**

An easy and convenient tool to open almost all types of drums. Ends of the wrench are designed to fit perfectly onto most 2" and 3/4" drum plugs. Made of cast aluminum, hardened and tempered for increased strength. Part Number : 950150




## New oil isn't as clean as you think.

Studies show that new oil is simply not clean enough for today's modern equipment. Unless your lubricant supplier is giving you a certificate that guarantees the level of cleanliness, it isn't without impurities. Fortunately, it is easy to clean. Using a ForFluids.com bulk storage system with certain configurations will clean your fluid coming in AND going out.


### **SPCC Guidelines**

The Oil Pollution Prevention regulation, under the authority of the Clean Water Act, sets forth requirements for prevention of, preparedness for, and response to oil discharges at specific non-transportation related facilities. To prevent oil from reaching navigable waters and adjoining shorelines, and to contain discharges of oil, the regulation requires these facilities to develop and implement SPCC plans, establish procedures, methods, and equipment requirements. There are a lot of different quidelines and regulations for the EPA's SPCC rule and


There are a lot of different guidelines and regulations for the EPA's SPCC rule and further information can be found online at: www.epa.gov

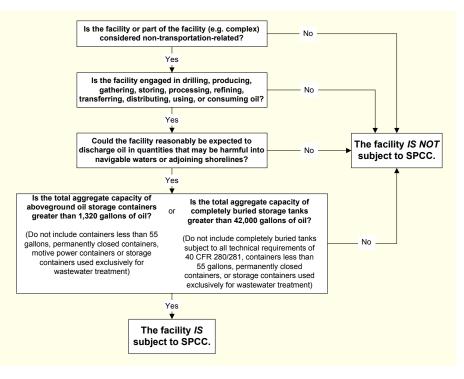



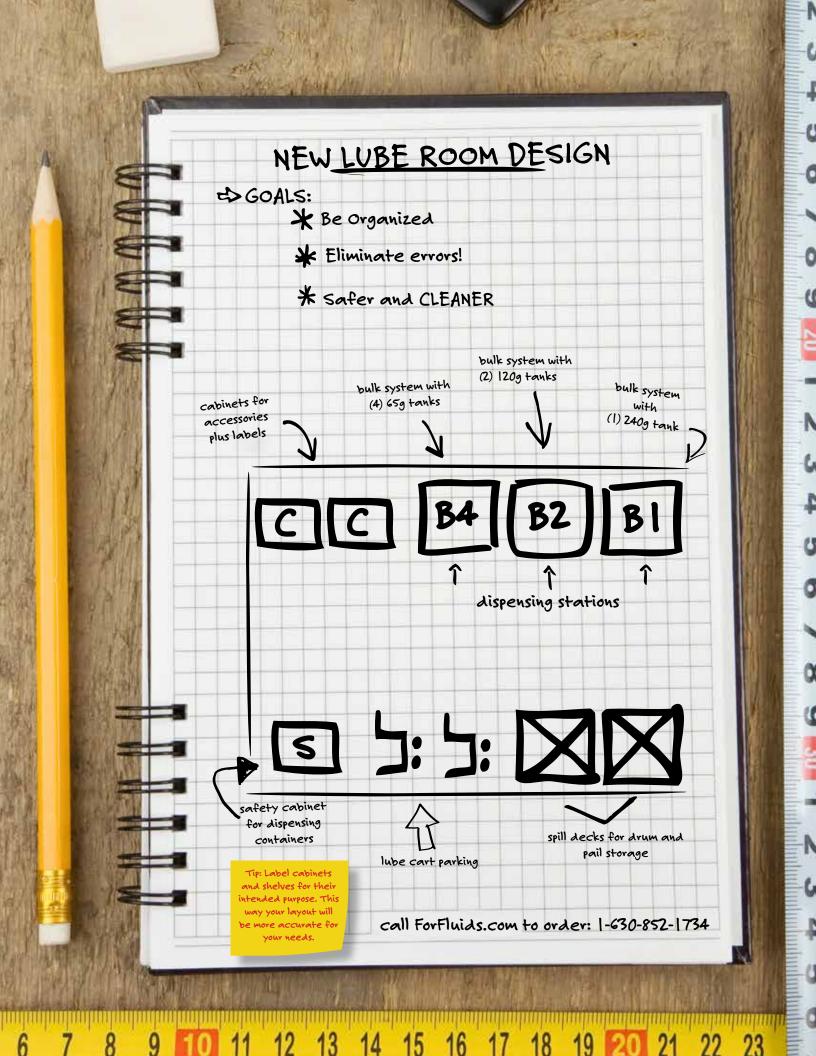




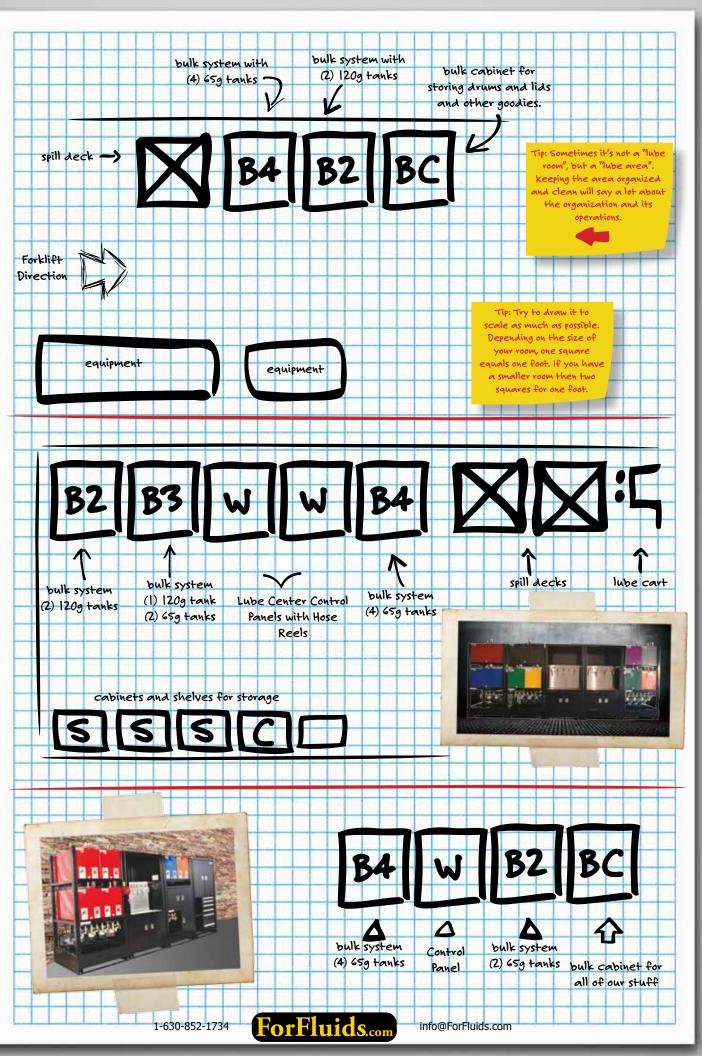


1.00	
-	-
_	TE.
-	
-	
E	
_	
<b>E</b>	-
5	
	10
<b>E</b>	5
-	T
6	
<b>E</b>	1
-	1
E_	-
E-	5
E=	Ξ
2.5	
E-	-
-	F
E-	5
2	T
-	
<b>E</b>	2
12.2	
<b>E</b>	=
<b>E</b>	
E-	-
-	
E.,	-
E	
-	-
<b>E</b>	
-	
<b>E</b>	5
2	
<b>E</b>	-
1	
<b>E</b>	-
-	T
-	5
E_	P
-	
E_	-
E	=
E-	-
	F
6	-
-	F
2	-
-	
<b>E</b>	-
-	
E	=
<b>E</b>	Ξ
5	-
	1000
<b>F</b>	-

Use this key as a guide if you are assigning each square as I foot.

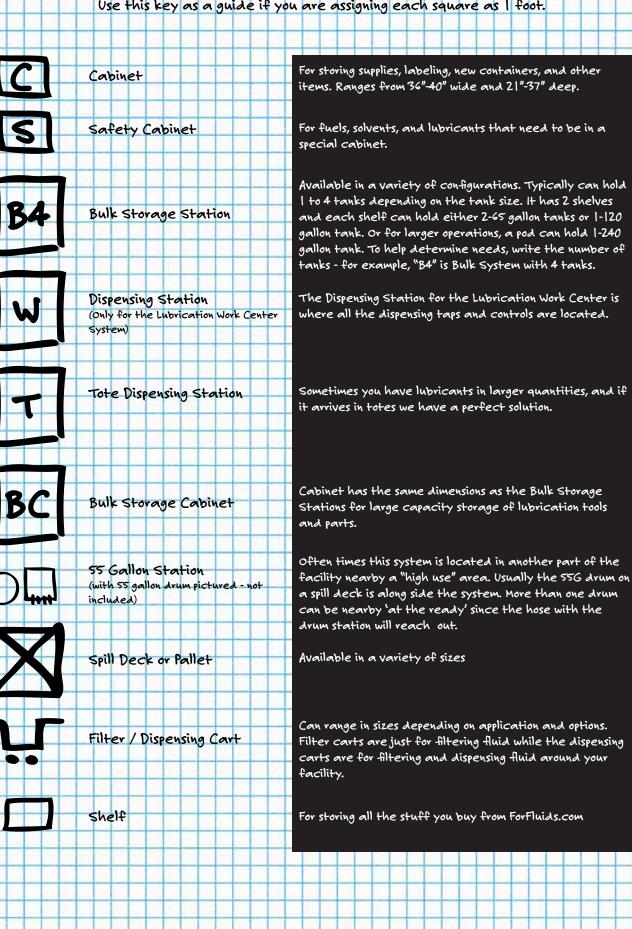


ForFluids


info@ForFluids.com

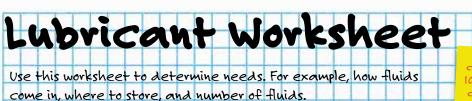


Oil Safe storage and container systems have 10 different colors. Color coding will help simplify dispensing and help eliminate errors.

### Lubricants List:

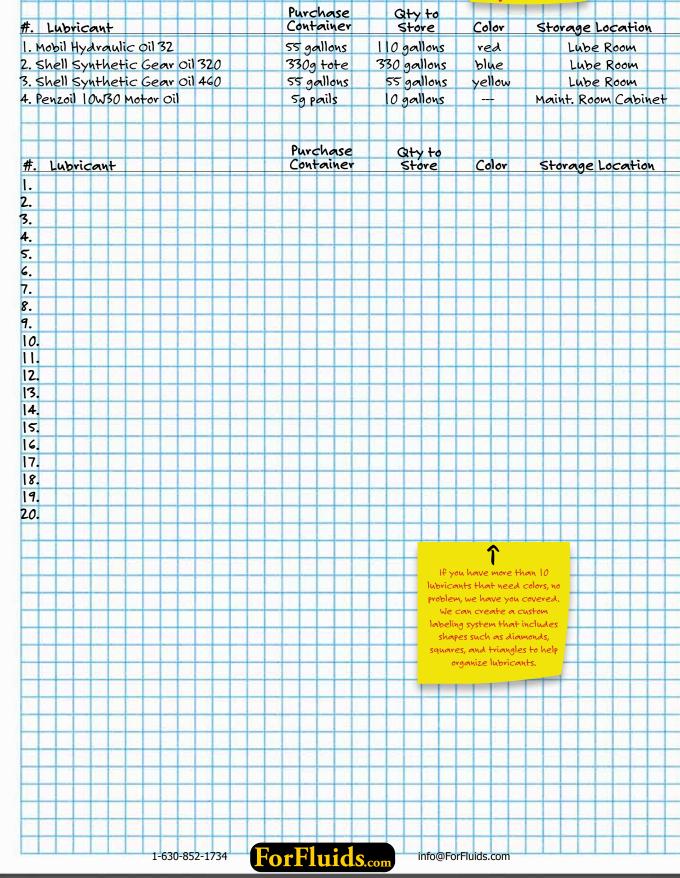

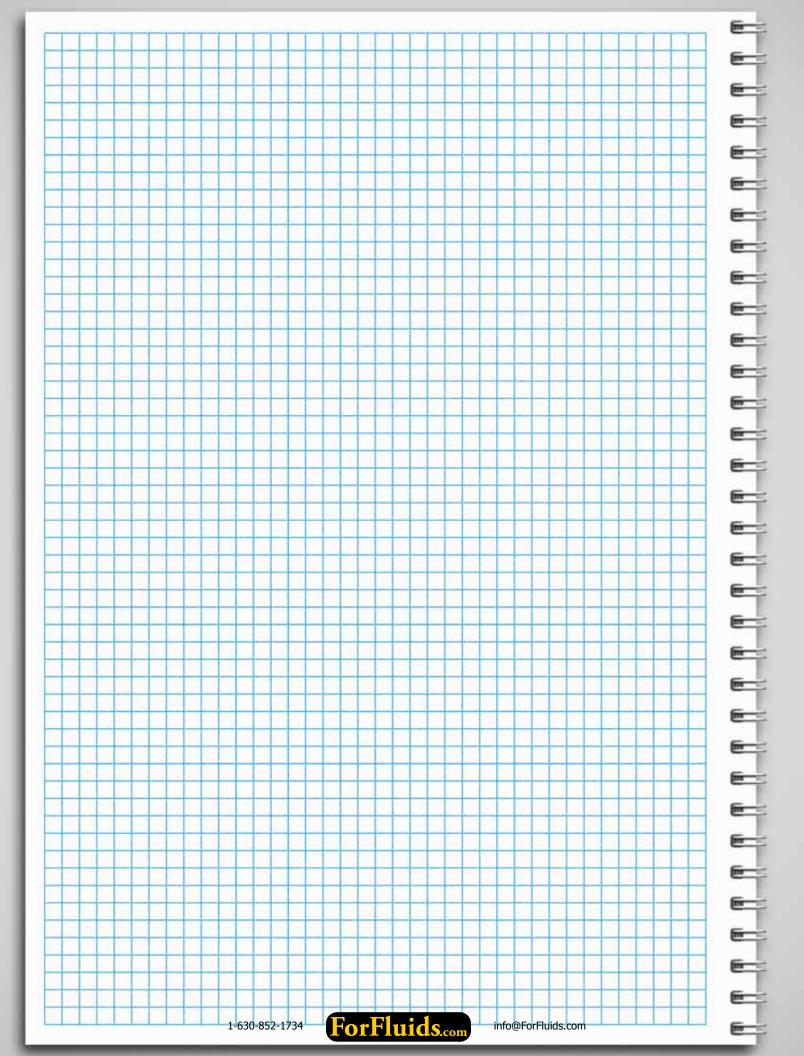

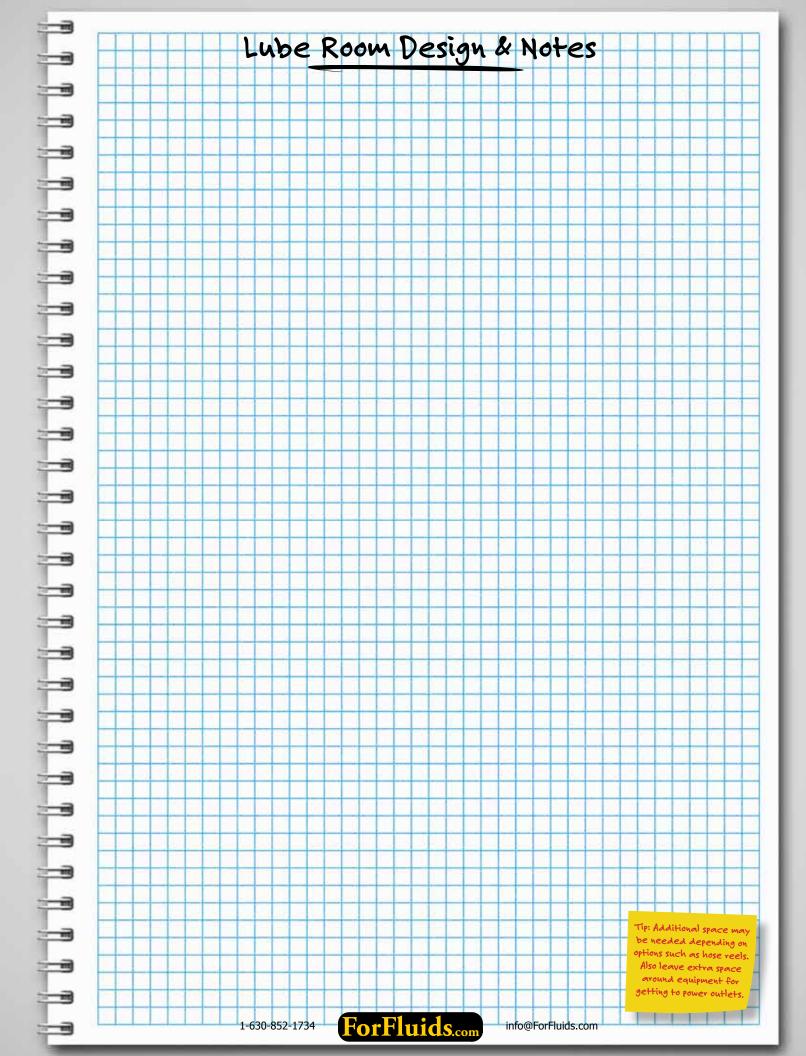



ForFluids.com Division of EDM Zap 1108 Front Street - Lisle IL 60532 USA Phone: 1-630-852-1734 Fax: 1-630-852-3678 www.ForFluids.com info@ForFluids.com

This brochure is to be used only as a guide for setting up a lube room. Local codes and ordinances vary. Always do you homework when setting up a facility. All information present is based on data available at the time of posting, is subject to change without notice. Oil Safe is a registered trademark of Whitmore.